

ABN: 72 657 573 544

Copyright Brown Davis Automotive Pty. Ltd. This document contains confidential and Technical information the property of Brown Davis Automotive Pty. Ltd.

HJLA6

1

Last edited: 1/09/2010

Fuel Tank Part List and Installation Instructions

TANK P/N: HJLA6

JACKAROO 1997on LWB – (DIESEL) 65ltr AUXILIARY PETROL TANK

Item	Description	Quantity	Part number	Р	С
1	TANK - AUXILIARY	1	HJLA6		
2	HOSE - TMP - 6mm	1.5m			
3	HOSE – TMP - 12.5mm	2.2m			
4	HOSE - FUEL AND EMISSION - 8mm	1.5m			
5	HOSE - FILLER - 44mm	80mm (x2)			
6	HOSE - FILLER - 44mm	130mm			
7	HOSE CLAMP - STAINLESS - 8-16mm	8			
8	HOSE CLAMP - STAINLESS - 12-20mm	2			
9	HOSE CLAMP – STAINLESS – 40-60mm	6			
10	DRAIN PLUG – MAGNETIC – M14 (fitted to tank)	1	DP-M14		
11	FUEL PICK UP – 3/8 x 1/4 BSP TAIL BARB	1			
12	BRASS – TAIL BARB –½ x ¼ BSP	1			
13	BRASS – ELBOW – ½ x ¼ BSP	1			
14	T-PIECE - NYLON BARBED – ½"	1			
15	CRIMP FITTING - BULLET MALE 4mm - RED	1			
16	CRIMP FITTING - BULLET FEMALE 4mm - RED	1			
17	CHANGEOVER RELAY 1				
18	SWITCH – ROCKER PILOT (B58327-01)				
19	WIRING LOOM - MODIFIED (ISUZU - M40975)	1			
20	WIRE - SINGLE CORE - 3.0mm - BLACK (earth wire for pump - eye (4mm red) to eye (6.5mm red) 150mm long)	1			
21	SENDER UNIT - 8-94407424-0 (eye & bullet terminals fitted)	1			
22	BOLT - HEX - M10 x 70mm - PLATED 8.8	1			
23	BOLT - HEX - M10 x 75mm - PLATED 8.8	1			
24	NUT – STANDARD PLATED – M10	2			
25	WASHER - FLAT PLATED - M10	2			
26	WASHER – SHAKEPROOF INTERNAL PLATED – M10 2				
27	SET SCREW - HEX - M8 x 25mm - PLATED 8.8	1			
28	WASHER - PANEL PLATED - M8	1			
29	WASHER - SPRING PLATED - M8	1			



ABN: 72 657 573 544

Copyright Brown Davis Automotive Pty. Ltd. This document contains confidential and Technical information the property of Brown Davis Automotive Pty. Ltd.

HJLA6 2

30				
31				
32	SCREW – TEK - 13mm	5		
33	C-CLAMP EXHAUST – 3/8 THREAD – C17 3 1/8"	1		
34	CABLE TIE – 14.5" BLACK	6		
35	DISCRIMINATOR VALVE	1		
36	DISCRIMINATOR VALVE SEAL	1		
37	FUEL PUMP – ROTARY INLINE	1		
38	FUEL FILTER – INLINE 8mm	1		
39	FILLER CAP - 86ULP	1		
40	TWIN FILLER NECK	1	TF-HJLA4	
41	FILLER TUBE	1	FT-HJLA5-a	
42	FILLER TUBE	1	FT-HJLA5-b	
43	WARRANTY CARD & INFORMATION SHEET	1		
44	BROWN DAVIS AUTOMOTIVE STICKER	1		

Quantity	Description	Packed
1	TANK (JLLA6)	
1.5m	6mm TMP FUEL HOSE	
1.5m	8mm N/PRENE FUEL HOSE	
2.2m	13mm TMP FUEL HOSE	
80mm (x2)	44mm N/PRENE FUEL HOSE	
130mm	44mm N/PRENE FUEL HOSE	
1	CHANGEOVER RELAY	
1	ELECTRONIC FUEL PUMP	
1	MALE BULLET TERMINAL (RED)	
1	F/MALE BULLET TERMINAL (RED)	
1	ROCKER SWITCH - PILOT (B58327-01)	
1	MODIFIED WIRING LOOM (ISUZU - M40975)	
1	EARTH WIRE FOR PUMP (eye to eye - 150mm long)	
1	8-94407424-0 FUEL GAUGE SENDER & GASKET (eye & bullet	
	terminals fitted)	
1	2 3/4" x 3/8" UNF H/T BOLT (P)	
1	3" x 3/8" UNF H/T BOLT (P)	
2	3/8" UNF H/T NUT (P)	
1	M8 x 25mm BOLT (P)	
5	M5 x 10mm MACHINE SCREW	
5	13mm TEK SCREWS	
2	3/8" FLAT WASHER	
1	5/16" x 1 1/4" FLAT PANEL WASHER	

PH: +61 (3) 9762 8722 FAX: +61 (3) 9762 9829 47 Holloway Drive, Bayswater, Victoria, Australia 3153



ABN: 72 657 573 544

Copyright Brown Davis Automotive Pty. Ltd. This document contains confidential and Technical information the property of Brown Davis Automotive Pty. Ltd.

HJLA6 3

1	5/16" SPRINGWASHER
2	3/8" SHAKEPROOF WASHER
5	M5 SPRINGWASHER
1	3/8" x 1/4" FUEL PICKUP (TAILBARB)
1	1/2" x 1/4" BSP BRASS TAILBARB
1	1/2" x 1/4" BSP BRASS ELBOW
1	1/4" BSP MAGNETIC DRAIN PLUG
1	1/2" "T-PIECE"
8	10-16mm HOSE CLAMPS STAINLESS
2	12-20mm HOSE CLAMPS STAINLESS
6	40-60mm HOSE CLAMPS STAINLESS
1	5/16" IN-LINE FUEL FILTER
1	FUEL CAP 86ULP
1	TWIN FILLER NECK (BDN52)
2	44mm FILLER TUBES (JLLAF1 & JLLAF2)
1	3 1/8" EXHAUST CLAMP
6	PLASTIC CABLE TIE - 14 1/2"
1	DISCRIMINATOR VALVE (FO-E7DZ9B593A)
1	DISCRIMINATOR VALVE SEAL (FO-E1FZ9B076B)
1	WARRANTY CARD & INFORMATION SHEET
1	BROWN DAVIS AUTOMOTIVE STICKER

Packed by (P):			Checked by (C):		
Date Packed:	/	/			



Brown Davis Automotive Pty. Ltd. ABN: 72 657 573 544

Copyright Brown Davis Automotive Pty. Ltd. This document contains confidential and Technical information the property of Brown Davis Automotive Pty. Ltd.

HJLA6 4

All Brown Davis Automotive fuel tank kits are manufactured to Australian Standards and the Australian Design Rules where applicable and carry a full **3 Year Warranty**. Construction in 2.0 mm (14 gauge) cold rolled, aluminium coated, steel ensures maximum strength and durability and minimum corrosion susceptibility. This gauge of steel is sufficiently impact resistant that an additional tank guard is not necessary (most standard tank guards are thinner than 1.5 mm).

All tanks are M.I.G. (Metal Inert Gas) welded to assure the strongest possible seams and are baffled to prevent fuel surge. They are then pressure tested using two different techniques to eliminate the possibility of leaks. Drain plugs are fitted horizontally to prevent them being damaged if the tank is scraped over rocks and are magnetic to collect any metallic dirt that may enter your fuel system.

In all cases, Brown Davis Automotive fuel tanks are designed with severe off road use in mind and will not compromise ground clearance, entry, exit or ramp over angles.

<u>AUXILIARY TANKS</u> Are designed to be installed in addition to the original factory fuel tank, with its own fuel gauge. An electrical changeover system simultaneously changes the source of fuel from the original (main) tank to the auxiliary tank (or vice versa), the vehicles fuel gauge is simultaneously changed over to indicate the level in the tank from which the fuel is being drawn.



ABN: 72 657 573 544


Copyright Brown Davis Automotive Pty. Ltd. This document contains confidential and Technical information the property of Brown Davis Automotive Pty. Ltd.

HJLA6

5



DIAGRAM

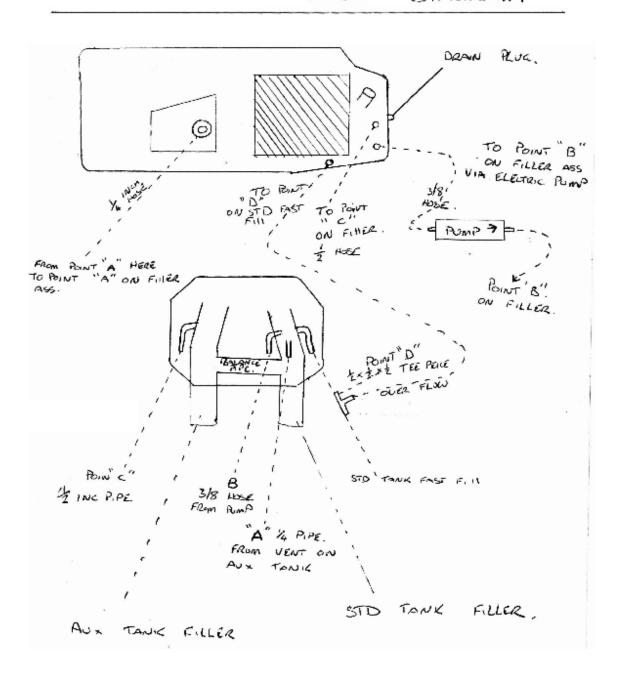





ABN: 72 657 573 544

Copyright Brown Davis Automotive Pty. Ltd. This document contains confidential and Technical information the property of Brown Davis Automotive Pty. Ltd.

HJLA6


6



JACKEROO AUXILARY TWIN FILLER **TEMPLATE**

- 1. CUT OUT TEMPLATE
 2. PLACE PAPER TEMPLATE INTO FILLER AREA, CAREFULLY ALLIGNING EXISTING HOLES WITH MARKS ON TEMPLATE.
 3. MARK AROUND TEMPLATE WITH A TEXTA

 - 4. CAREFULLY CUT AROUND LINE MARKED

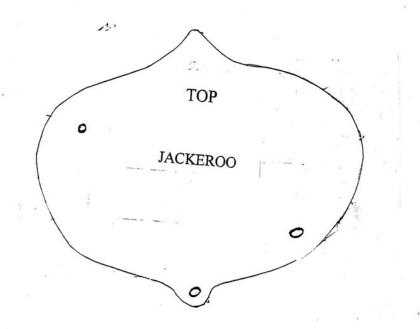

WHEN THIS AREA IS REMOVED THE TWIN FILLER CAN BE INSTALLED ,HIDING THE NEW HOLE JUST CUT.

47 Holloway Drive, Bayswater, Vic. 3153 Phone (03) 9762 8722 Fax (03) 9762 9829



Brown Davis Automotive Pty. Ltd. ABN: 72 657 573 544

Copyright Brown Davis Automotive Pty. Ltd. This document contains confidential and Technical information the property of Brown Davis Automotive Pty. Ltd.

HJLA6 7

OPERATION INFORMATION

The operation of your new Brown Davis Automotive gas conversion fuel tank is little different from the original main tank, however very similar.

Filling the tank may be via a dual filler neck in the factory fuel fill position, or may be a remote filler at another location as identified to you upon installation. Simply fill the auxiliary petrol tank exactly as with a standard tank via the appropriate filler type.

The fuel gauge is separate to the main tank, however will read as with a standard gauge indicating empty/full and the progression in between. It should read with the same degree of accuracy as with a standard tank other than the difference in capacity to the standard tank.

The low fuel light for the main tank will still function as normal.

Maintenance and service of your new Brown Davis Automotive auxiliary fuel tank other than the recommended 1000km check and filter change should be in align with the normal vehicle Manufactures service schedule and guidelines. Remember the long range tank has a magnetic drain plug that the standard tank did not. With the fuel level low the drain plug can be removed and cleaned to remove any metal fragments introduced from the filler bowser scraping on the filler tube when filling or particles and rust flakes from jerry cans used on long trips. This facility is supplied to protect the in-tank fuel pumps fitted to most modern vehicle fuel tanks.

Finally make sure the warranty card is filled out completely and returned to Brown Davis Automotive and that the warranty information is read and understood. If there are any queries about this or any of the above information please contact us at Brown Davis at the attached address or phone and fax numbers for assistance.